


Par 64 Photometric Chart Comparison:



Par 64 HP 24 3W

R	6120	1970	619	260	126	88	lux
G	10810	3710	986	404	230	148	lux
B	10500	3700	1113	466	260	162	lux
RGB	25200	9600	2470	1095	637	427	lux

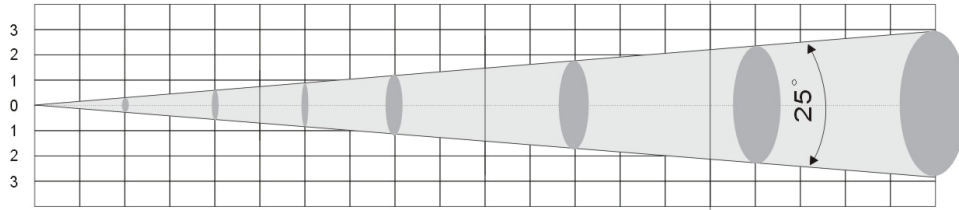


1.64'	3.28'	6.56'	9.84'	13.11'	16.39'	Distance(Feet)
0.5	1	2	3	4	5	Distance(Meters)
1.39'	2.79'	5.57'	8.36'	11.15'	13.93'	Diameter(Feet)
0.425	0.85	1.7	2.55	3.4	4.25	Diameter(Meters)



LED Par 64

R	732	231	93.5	53.7	20.2	7.9	3.7	lux
G	1128	464	221	121.4	37.8	20.6	8.6	lux
B	1344	619	296	179	72	31	17	lux
RGB	2780	1026	497	287	119.4	56.8	31.1	lux

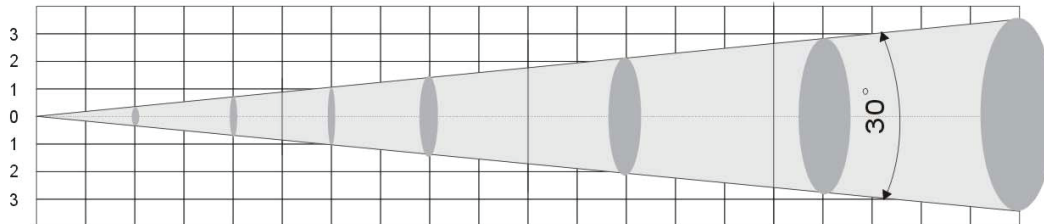

1.64'	3.28'	4.92'	6.56'	9.84'	13.11'	16.39'	Distance(Feet)
0.5	1	1.5	2	3	4	5	Distance(Meters)
1.39'	2.79'	4.18'	5.57'	8.36'	11.15'	13.93'	Diameter(Feet)
0.425	0.85	1.275	1.7	2.55	3.4	4.25	Diameter(Meters)