

LED PAR 64 WHITE



General Description:

LED Par 64 White features the ability to produce a 183 10mm super bright Neutral White light. State-of-the-art LED lighting, utilizing high efficiency, high brightness LEDs for entertainment and architectural lighting effects. Applications include stage lighting, club lighting, accent lighting, back lighting and spot lighting. Get rid of the heat from traditional can lights with our WDM Par 64 white fixture.

Specification:

Size: 11.5" x 8.5" x 8.5"

Power Consumption: 30w

183 10mm super bright Neutral White

Output distance: 50'

Lifetime: 60 to 100 thousand hours

Input power: 120V AC

Easily Controlled via DMX or Auto Program

4 DMX Channels with intensity dimmer and stroke

Sound Activation




Dip Switch.

Dip Switch Chart

Mode	Dip 1	Dip2	Dip3	Dip4	Dip5	Dip6	Dip7	Dip8	Dip9	Dip10	Function
Auto Run (Master projector)	0	0	0	0	0	0	X	X	0	0	Color changing and color fading Select running speed via dip7, dip 8
Sound Activated (Master projector)	X	X	X	X	X	X	0	0	0	0	Static color and flash Select static color via dip1 - dip3 (separately for R.G.B) select flash speed via Dip4 - dip6
DMX	X	X	X	X	X	X	X	X	X	1	DMX mode CH1 → R CH2 → G CH3 → B CH4 → Dimmer CH5 → flash
Other	1	0	0	0	0	0	0	0	0	1	1. DMX address is 1 when in DMX mode 2. As Slave projector when in M/S mode
	0	0	0	0	0	0	0	0	0	1	Black out

LED PAR 64 WHITE

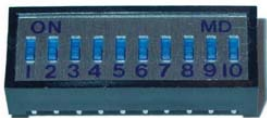


Dip Switch.

Dip Switch Chart

Mode	Dip 1	Dip2	Dip3	Dip4	Dip5	Dip6	Dip7	Dip8	Dip9	Dip10	Function
Auto Run (Master projector)	0	0	0	0	0	0	X	X	0	0	Color changing and color fading Select running speed via dip7, dip 8
Sound Activated (Master projector)	X	X	X	X	X	X	0	0	0	0	Static color and flash Select static color via dip1~dip3 (separately for R.G.B) select flash speed via Dip4~dip6
DMX	X	X	X	X	X	X	X	X	X	1	DMX mode CH1→R CH2→G CH3→B CH4→Dimmer CH5→flash
Other	1	0	0	0	0	0	0	0	0	1	1. DMX address is 1 when in DMX mode 2. As Slave projector when in M/S mode
	0	0	0	0	0	0	0	0	0	1	Black out

Photometric

W 3100 — 1197 — 570 — 335 — 126.1 — 87.9 — 53.8 lux

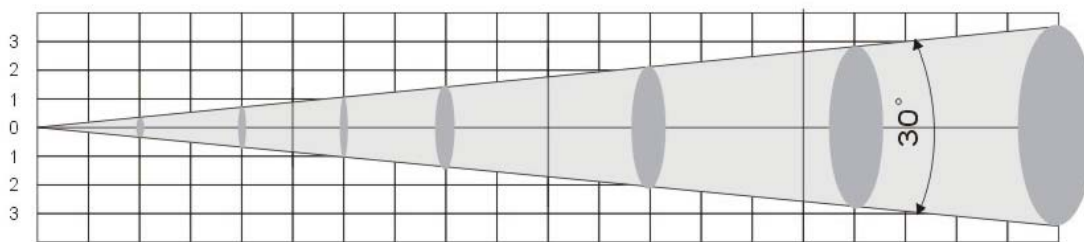

1.64'	3.28'	4.92'	6.56'	9.84'	13.11'	16.39'	Distance(Feet)
0.5	1	1.5	2	3	4	5	Distance(Meters)
1.39'	2.79'	4.18'	5.57'	8.36'	11.15'	13.93'	Diameter(Feet)
0.425	0.85	1.275	1.7	2.55	3.4	4.25	Diameter(Meters)