


3 W LED LIGHT ENGINE

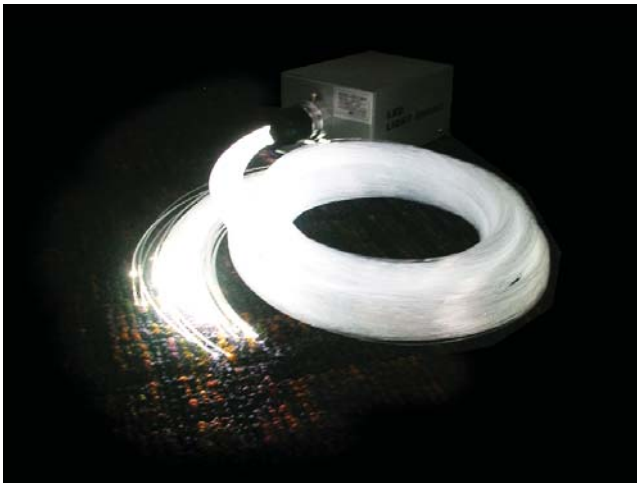

General Description:

Light Engine is the source of light in fiber optic system. That is why it is critically important to the success of any fiber optic lighting installation. We produce Light Engine for every possible application: commercial and residential, indoor and outdoor, damp and wet location, side lighting and end lighting.

LED Light Engines are our latest development. It includes single color and multi-color.

LED Light Engine is specially designed for do-it-yourself market, its long-life, full-color mixing, easy-operation and low cost enable the high-tech fiber and light engine go into every family who are interested in them.

Specification:

Voltage: 12V DC

Power: 3W

Colors: 6colors

Color changing

Kit Set for DIY or Home decoration

Remote Control: optional

Dimension: L 7" x W 2.75" x H 2.36"

3 W LED LIGHT ENGINE

Specifications:



Front View::



Back View::



ITEM NO.	LAMP SPECIFICATION	LIFE of LAMP	POWER	WEIGHT	REMARK
LLE-003	High power super-brite 3W LED	100,000hours	3W	0.6KG	Manual Control
LLE-003WR				0.7KG	Wireless Remote Control

LED 3W High power Light Engine can maximum connect up to 200pcs of 1X0.75mm fiber optic and maximum length is 4meters.

ITEM NO.	LIGHT ENGINE	FIBER SPECIFICATION			WEIGHT	END PIECE*
		Spec.	Quantity	Length		
LEDK-315	LLE-003	0.75mm	150pcs	2m	1.1KG	150pcs
LEDK-320			200pcs	3m	1.2KG	200pcs
LEDK-315WR	LLE-003WR	0.75mm	150pcs	2m	1.2KG	150pcs
LEDK-320WR			200pcs	3m	1.3KG	200pcs

Note: * End pieces are optional.

End Piece available for LED Light Engine Fiber Kit:



FE-P31



FE-P32



FE-P33



FE-P34